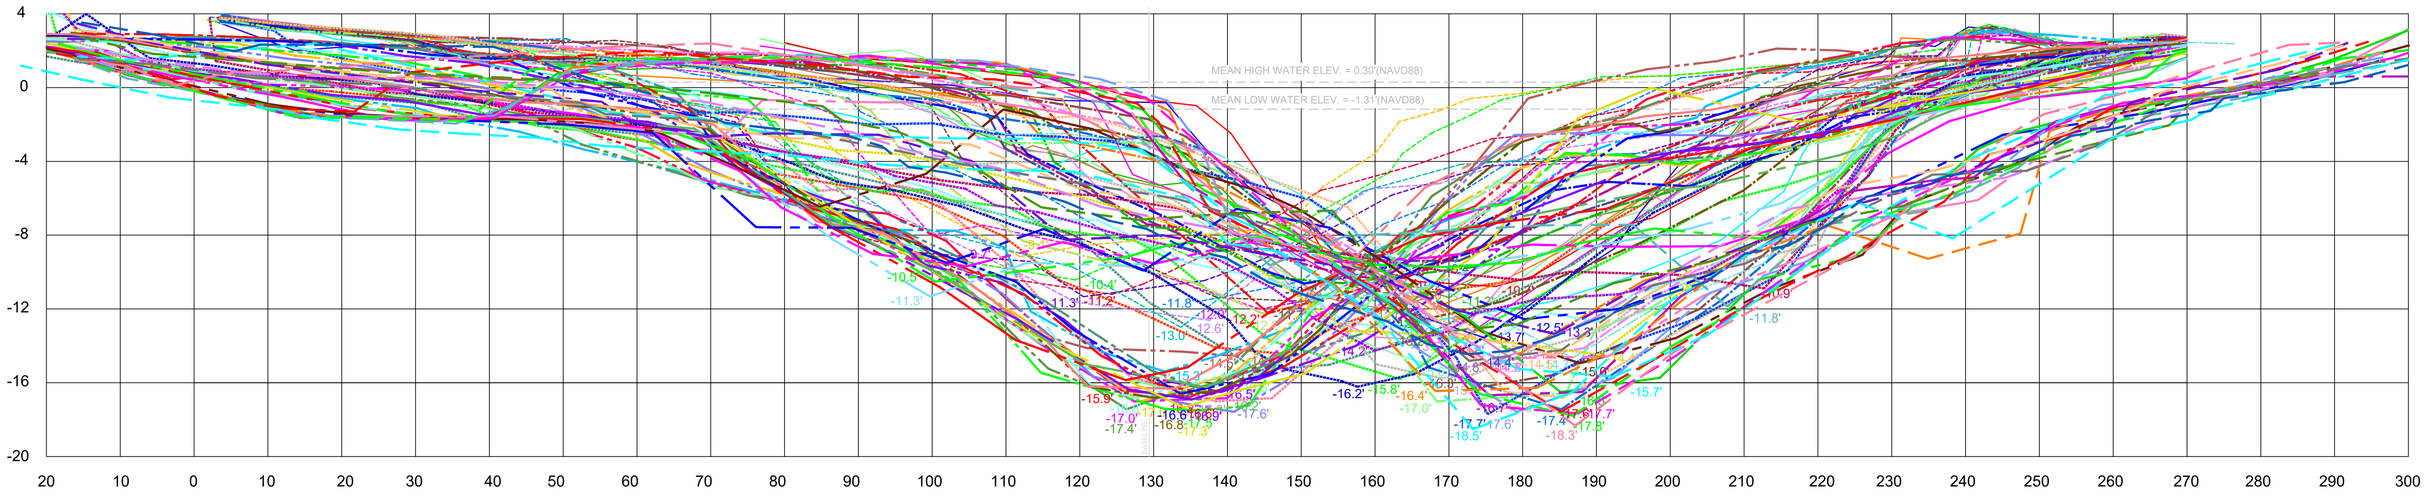

CROSS SECTION "A"

HORIZONTAL SCALE 1"=10'

VERTICAL SCALE 1"=4'

	DATE OF SURVEY	LOW ELEV.	X-SEC. AREA
	OCT. 29, 2024	-13.8'	844
	NOV. 4, 2024	-15.0'	955
	NOV. 12, 2024	-10.7'	655
	NOV. 18, 2024	-13.0'	1064
	NOV. 25, 2024	-13.7'	686
	DEC. 2, 2024	-12.0'	716
	DEC. 10, 2024	-11.2'	758
	DEC. 16, 2024	-12.0'	817
	DEC. 20, 2024	-13.6'	902
	JAN. 6, 2025	-11.7'	897
	JAN. 13, 2025	-11.8'	722

	DATE OF SURVEY	LOW ELEV.	X-SEC. AREA
	JAN. 21, 2025	-9.1'	629
	JAN. 27, 2025	-10.4'	755
	FEB. 4, 2025	-11.2'	888
	FEB. 10, 2025	-11.3'	1017
	FEB. 18, 2025	-12.6'	1005
	FEB. 25, 2025	-13.0'	965
	MAR. 3, 2025	-12.0'	1022
	MAR. 11, 2025	-12.2'	950
	MAR. 17, 2025	-9.4'	833
	MAR. 24, 2025	-10.7'	873
	MAR. 31, 2025	-10.2'	782
	APR. 7, 2025	-12.2'	748
	APR. 14, 2025	-10.7'	873
	APR. 21, 2025	-12.7'	863
	APR. 28, 2025	-14.7'	1007
	MAY 5, 2025	-17.0'	1175
	MAY 14, 2025	-14.4'	1033
	MAY 19, 2025	-15.3'	1030
	MAY 30, 2025	-17.4'	1199
	JUNE 4, 2025	-16.3'	1066
	JUNE 9, 2025	-16.8'	1084
	JUNE 17, 2025	-17.7'	1222
	JUNE 23, 2025	-10.9'	1326
	JUNE 30, 2025	-15.8'	1468
	JULY 8, 2025	-14.4'	1407
	JULY 15, 2025	-14.0'	1486
	JULY 21, 2025	-14.2'	1477
	JULY 28, 2025	-15.8'	1543
	AUG. 8, 2025	-16.2'	1487
	AUG. 11, 2025	-15.3'	1470
	AUG. 18, 2025	-14.4'	1457
	AUG. 25, 2025	-17.0'	1293
	SEPT. 2, 2025	-14.5'	1134
	SEPT. 9, 2025	-15.3'	1352
	SEPT. 16, 2025	-16.8'	1322
	SEPT. 22, 2025	-17.4'	1351

	DATE OF SURVEY	LOW ELEV.	X-SEC. AREA
	OCT. 1, 2025	-17.0'	1440
	OCT. 9, 2025	-16.5'	1587
	OCT. 15, 2025	-17.6'	1447
	OCT. 21, 2025	-17.0'	1468
	OCT. 31, 2025	-17.5'	1392
	NOV. 6, 2025	-16.8'	1263
	NOV. 10, 2025	-16.5'	1559
	NOV. 20, 2025	-16.6'	1405
	NOV. 24, 2025	-16.3'	1402
	DEC. 1, 2025	-16.6'	1320
	DEC. 8, 2025	-16.8'	1302
	DEC. 15, 2025	-16.3'	1241
	JAN. 5, 2026	-16.9'	1564
	JAN. 13, 2026	-17.3'	1488
	JAN. 20, 2026	-16.2'	1715
	JAN. 26, 2026	-15.9'	1610
	FEB. 2, 2026	-11.3'	1567
	FEB. 10, 2026	-10.5'	1505
	FEB. 17, 2026	-9.7'	1548
	FEB. 23, 2026	-12.5'	1751
	MAR. 2, 2026	-15.0'	1623
	MAR. 9, 2026	-14.7'	1459
	MAR. 18, 2026	-16.5'	1338
	MAR. 23, 2026	-16.7'	1314
	MAR. 31, 2026	-16.4'	1417
	APR. 6, 2026	-17.6'	1317
	APR. 13, 2026	-17.7'	1290
	APR. 20, 2026	-11.8'	1033
	APR. 28, 2026	-17.8'	1348
	MAY 4, 2026	-17.6'	1341
	MAY 11, 2026	-18.3'	1267
	MAY 18, 2026	-15.7'	1478
	JUNE 3, 2026	-13.3'	1482
	JUNE 8, 2026	-14.5'	1399
	JUNE 22, 2026	-13.2'	1381

	DATE OF SURVEY	LOW ELEV.	X-SEC. AREA
	JUNE 29, 2026	-14.8'	1445
	JULY 6, 2026	-14.8'	1498
	JULY 17, 2026	-18.5'	1858
	AUG. 3, 2026	-14.4'	1573

SCALE 1"=50'

T.B.M. #1
4"x4" CM SET
N=1045287.285
E=489886.601
ELEV. 4.15'
NAVD88

T.B.M. #2
4"x4" CM SET
N=1044995.877
E=490079.844
ELEV. 4.27'
NAVD88

SURVEYOR'S NOTES

1. ELEVATIONS SHOWN ON THE SURVEY ARE NORTH AMERICAN VERTICAL DATUM 88 (NAVD88) AND WERE DERIVED USING THE FLORIDA PERMANENT REFERENCE NETWORK (FPRN) STATIONS "FLSS," "FLSC," AND "FLSN." THE ACCURACY OBTAINED IS BASED ON REDUNDANT RTK (REAL TIME KINEMATIC) GPS MEASUREMENT. THE MEAN POSITIONAL ERROR OF THE REDUNDANT OBSERVATION SETS FOR EACH STATION CONTROL WAS FOUND TO BE +/– 0.2 FEET.

2. MEAN HIGH WATER AND MEAN LOW WATER ELEVATIONS ARE PROVIDED ON THE DEPARTMENT OF ENVIRONMENTAL PROTECTION, LAND BOUNDARY INFORMATION SYSTEM WEBSITE (LABINS.ORG).

TIDE INTERPOLATION POINT 100156 WAS USED FOR THE PROJECT SITE.

MEAN HIGH WATER ELEVATION IS 0.30 FEET, NAVD88.
MEAN LOW WATER ELEVATION IS –1.31 FEET, NAVD88.

3. THE COORDINATES ARE GRID, FLORIDA STATE PLANE COORDINATE SYSTEM, FL WEST ZONE, NAD83 2011 ADJUSTMENT. CONTROL FOR THE SURVEY IS BASED ON SARASOTA COUNTY CORS STATION FLSN, FLSC, FLSS AND PROPAGATED TO THE LOCAL AREA USING REAL TIME KINETIC GPS TECHNIQUE.

4. CROSS SECTION AREA CALCULATED TO THE MEAN HIGH WATER ELEVATION.

5. 2025 AERIAL FOR REFERENCE ONLY.

MAP OF SURVEY

Sarasota County

SARASOTA COUNTY
TRANSPORTATION, SURVEY-MAPPING
1001 SARASOTA CENTER BLVD. SARASOTA, FLORIDA 34240
941/861-6709 * 941/861-6053 * FAX 941/861-6431

I HEREBY CERTIFY THAT THIS MAP OF SURVEY REPRESENTS A TOPOGRAPHIC SURVEY OF THE LANDS AS SHOWN AND DESCRIBED HEREON, THAT THE SURVEY WAS RECENTLY PERFORMED UNDER MY DIRECTION, THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND THAT THE SURVEY MEETS THE STANDARDS OF PRACTICE AS SET FORTH BY THE FLORIDA BOARD OF PROFESSIONAL LAND SURVEYORS IN CHAPTER 5J-17, FLORIDA ADMINISTRATIVE CODE PURSUANT TO SECTION 472.027, FLORIDA STATUTES.

DRAFT

TERI S. OWEN, Professional Surveyor and Mapper No. 5928

ABBREVIATION LEGEND

N&D = NAIL AND DISK
CONC. = CONCRETE
MON. = MONUMENT
FND. = FOUND
NO. = NUMBER
T.B.M. = TEMPORARY BENCH MARK
TEMP. = TEMPORARY
ELEV. = ELEVATION
CM = CONCRETE MONUMENT
SEC. = SECTION
TWP. = TOWNSHIP
RNG. = RANGE
N = NORTHING
E = EASTING
SQ. FT. = SQUARE FEET

SYMBOL LEGEND

⊙ – NAIL AND DISK SET PSM 5928
● – NAIL & DISK FOUND PSM 5928
⊕ – TEMP. BENCH MARK 4"x4" CONCRETE MONUMENT STAMPED SARCO BENCH MARK

MIDNIGHT PASS
(REOPENING)

PROJ. NO.: 24057		DATE OF DATA ACQUISITION: FIELD WORK STARTED 10-29-24 AND IS ONGOING DRAWING UPDATED WEEKLY
SEC: 4	TWP: 38 S. RNG: 18 E.	
FIELD BOOK	PG.	DRAWN BY: J.M./T.O.
...SURVEY\Midnight Pass Cross Sections 2024		CHECKED BY:

SHEET NO. 1 OF 1

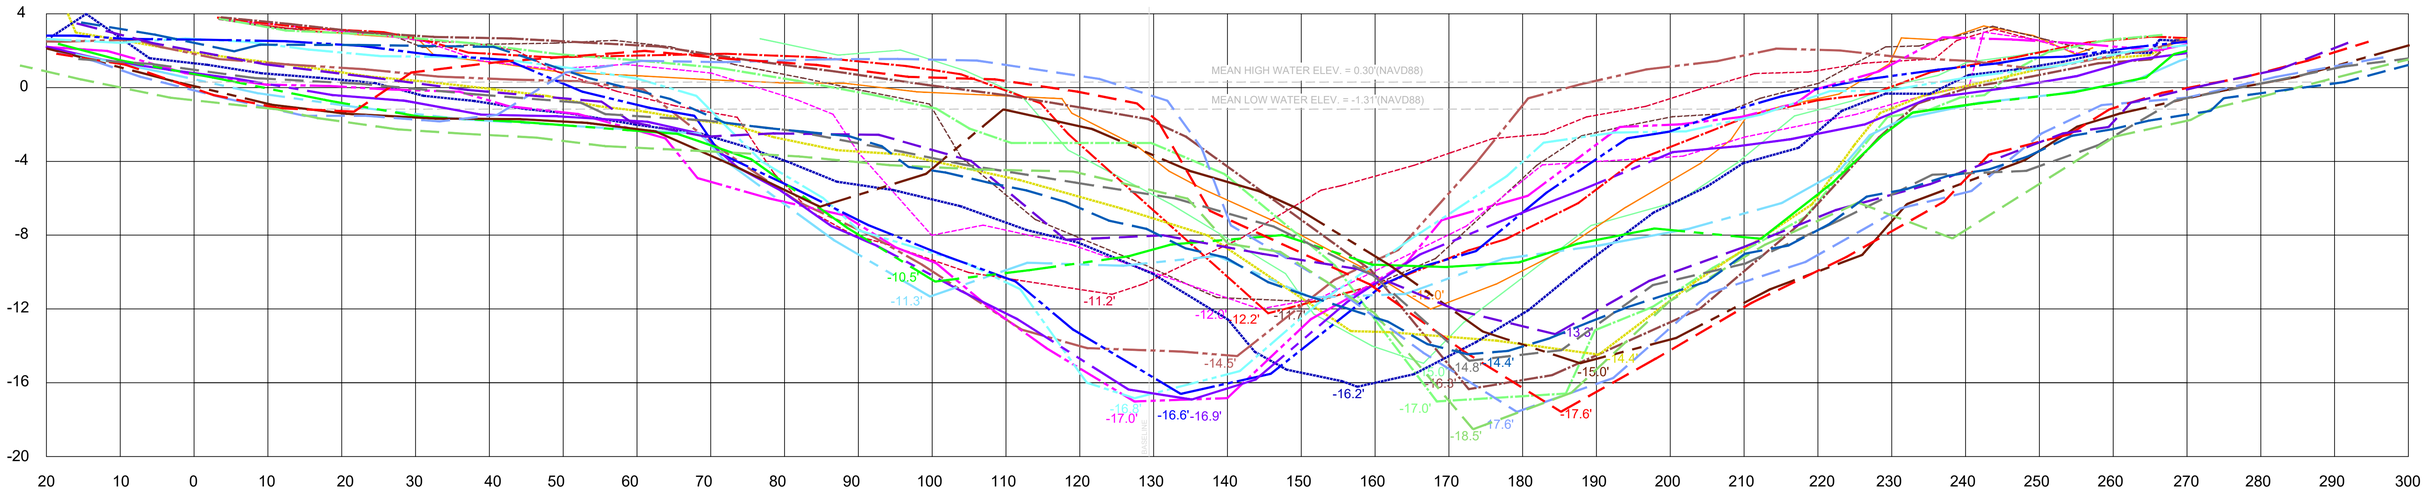

CROSS SECTION "A"

HORIZONTAL SCALE 1"=10'

VERTICAL SCALE 1"=4'

DATE OF SURVEY		LOW ELEV.	X-SEC. AREA
OCT. 29, 2024	*	-13.8'	844
NOV. 4, 2024	*	-15.0'	955
NOV. 12, 2024		-10.7'	655
NOV. 18, 2024		-13.0'	1064
NOV. 25, 2024		-13.7'	686
DEC. 2, 2024	*	-12.0'	716
DEC. 10, 2024		-11.2'	758
DEC. 16, 2024		-12.0'	817
DEC. 20, 2024		-13.6'	902
JAN. 6, 2025	*	-11.7'	897
JAN. 13, 2025		-11.8'	722

DATE OF SURVEY		LOW ELEV.	X-SEC. AREA
JAN. 21, 2025		-9.1'	629
JAN. 27, 2025		-10.4'	755
FEB. 4, 2025	*	-11.2'	888
FEB. 10, 2025		-11.3'	1017
FEB. 18, 2025		-12.6'	1005
FEB. 25, 2025		-13.0'	965
MAR. 3, 2025	*	-12.0'	1022
MAR. 11, 2025		-12.2'	950
MAR. 17, 2025		-9.4'	833
MAR. 24, 2025		-10.7'	873
MAR. 31, 2025		-10.2'	782
APR. 7, 2025	*	-12.2'	748
APR. 14, 2025		-10.7'	873
APR. 21, 2025		-12.7'	863
APR. 28, 2025		-14.7'	1007
MAY 5, 2025	*	-17.0'	1175
MAY 14, 2025		-14.4'	1033
MAY 19, 2025		-15.3'	1030
MAY 30, 2025		-17.4'	1199
JUNE 4, 2025	*	-16.3'	1066
JUNE 9, 2025		-16.8'	1084
JUNE 17, 2025		-17.7'	1222
JUNE 23, 2025		-10.9'	1326
JUNE 30, 2025		-15.8'	1468
JULY 8, 2025	*	-14.4'	1407
JULY 15, 2025		-14.0'	1486
JULY 21, 2025		-14.2'	1477
JULY 28, 2025		-15.8'	1543
AUG. 8, 2025	*	-16.2'	1487
AUG. 11, 2025		-15.3'	1470
AUG. 18, 2025		-14.4'	1457
AUG. 25, 2025		-17.0'	1293
SEPT. 2, 2025		-14.5'	1134
SEPT. 9, 2025	*	-15.3'	1352
SEPT. 16, 2025		-16.8'	1322
SEPT. 22, 2025		-17.4'	1351

DATE OF SURVEY		LOW ELEV.	X-SEC. AREA
OCT. 1, 2025	*	-17.0'	1440
OCT. 9, 2025		-16.5'	1587
OCT. 15, 2025		-17.6'	1447
OCT. 21, 2025		-17.0'	1468
OCT. 31, 2025		-17.5'	1392
NOV. 6, 2025	*	-16.8'	1263
NOV. 10, 2025		-16.5'	1559
NOV. 20, 2025		-16.6'	1405
NOV. 24, 2025		-16.3'	1402
DEC. 1, 2025	*	-16.6'	1320
DEC. 8, 2025		-16.8'	1302
DEC. 15, 2025		-16.3'	1241
JAN. 5, 2026	*	-16.9'	1564
JAN. 13, 2026		-17.3'	1488
JAN. 20, 2026		-16.2'	1715
JAN. 26, 2026		-15.9'	1610
FEB. 2, 2026	*	-11.3'	1567
FEB. 10, 2026		-10.5'	1505
FEB. 17, 2026		-9.7'	1548
FEB. 23, 2026		-12.5'	1751
MAR. 2, 2026	*	-15.0'	1623
MAR. 9, 2026		-14.7'	1459
MAR. 18, 2026		-16.5'	1338
MAR. 23, 2026		-16.7'	1314
MAR. 31, 2026		-16.4'	1417
APR. 6, 2026	*	-17.6'	1317
APR. 13, 2026		-17.7'	1290
APR. 20, 2026		-11.8'	1033
APR. 28, 2026		-17.8'	1348
MAY 4, 2026	*	-17.6'	1341
MAY 11, 2026		-18.3'	1267
MAY 18, 2026		-15.7'	1478
JUNE 3, 2026	*	-13.3'	1482
JUNE 8, 2026		-14.5'	1399
JUNE 22, 2026		-13.2'	1381

DATE OF SURVEY		LOW ELEV.	X-SEC. AREA
JUNE 29, 2026		-14.8'	1445
JULY 6, 2026	*	-14.8'	1498
JULY 17, 2026		-18.5'	1858
AUG. 3, 2026	*	-14.4'	1573

SCALE 1"=50'

T.B.M. #1
4"x4" CM SET
N=1045287.285
E=489886.601
ELEV. 4.15'
NAVD88

T.B.M. #2
4"x4" CM SET
N=1044995.877
E=490079.844
ELEV. 4.27'
NAVD88

SURVEYOR'S NOTES

1. ELEVATIONS SHOWN ON THE SURVEY ARE NORTH AMERICAN VERTICAL DATUM 88 (NAVD88) AND WERE DERIVED USING THE FLORIDA PERMANENT REFERENCE NETWORK (FPRN) STATIONS "FLSS," "FLSC," AND "FLSN." THE ACCURACY OBTAINED IS BASED ON REDUNDANT RTK (REAL TIME KINEMATIC) GPS MEASUREMENT. THE MEAN POSITIONAL ERROR OF THE REDUNDANT OBSERVATION SETS FOR EACH STATION CONTROL WAS FOUND TO BE +/- 0.2 FEET.

2. MEAN HIGH WATER AND MEAN LOW WATER ELEVATIONS ARE PROVIDED ON THE DEPARTMENT OF ENVIRONMENTAL PROTECTION, LAND BOUNDARY INFORMATION SYSTEM WEBSITE (LABINS.ORG).

TIDE INTERPOLATION POINT 100156 WAS USED FOR THE PROJECT SITE.

MEAN HIGH WATER ELEVATION IS 0.30 FEET, NAVD88.
MEAN LOW WATER ELEVATION IS -1.31 FEET, NAVD88.

3. THE COORDINATES ARE GRID, FLORIDA STATE PLANE COORDINATE SYSTEM, FL WEST ZONE, NAD83 2011 ADJUSTMENT. CONTROL FOR THE SURVEY IS BASED ON SARASOTA COUNTY CORS STATION FLSN, FLSC, FLSS AND PROPAGATED TO THE LOCAL AREA USING REAL TIME KINETIC GPS TECHNIQUE.

4. CROSS SECTION AREA CALCULATED TO THE MEAN HIGH WATER ELEVATION.

5. 2025 AERIAL FOR REFERENCE ONLY.

MAP OF SURVEY

Sarasota County

SARASOTA COUNTY
TRANSPORTATION, SURVEY-MAPPING
1001 SARASOTA CENTER BLVD. SARASOTA, FLORIDA 34240
941/861-6709 * 941/861-6053 * FAX 941/861-6431

I HEREBY CERTIFY THAT THIS MAP OF SURVEY REPRESENTS A TOPOGRAPHIC SURVEY OF THE LANDS AS SHOWN AND DESCRIBED HEREON, THAT THE SURVEY WAS RECENTLY PERFORMED UNDER MY DIRECTION, THAT IT IS TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF AND THAT THE SURVEY MEETS THE STANDARDS OF PRACTICE AS SET FORTH BY THE FLORIDA BOARD OF PROFESSIONAL LAND SURVEYORS IN CHAPTER 5J-17, FLORIDA ADMINISTRATIVE CODE PURSUANT TO SECTION 472.027, FLORIDA STATUTES.

DRAFT

TERI S. OWEN, Professional Surveyor and Mapper No. 5928

ABBREVIATION LEGEND

N&D = NAIL AND DISK
CONC. = CONCRETE
MON. = MONUMENT
FND. = FOUND
NO. = NUMBER
T.B.M. = TEMPORARY BENCH MARK
TEMP. = TEMPORARY
ELEV. = ELEVATION
CM = CONCRETE MONUMENT
SEC. = SECTION
TWP. = TOWNSHIP
RNG. = RANGE
N = NORTHING
E = EASTING
SQ. FT. = SQUARE FEET

SYMBOL LEGEND

⊙ - NAIL AND DISK SET PSM 5928
● - NAIL & DISK FOUND PSM 5928
⊕ - TEMP. BENCH MARK 4"x4" CONCRETE MONUMENT STAMPED SARCO BENCH MARK

MIDNIGHT PASS
(REOPENING)

PROJ. NO.: 24057			DATE OF DATA ACQUISITION: FIELD WORK STARTED 10-29-24 AND IS ONGOING DRAWING UPDATED WEEKLY
SEC: 4	TWP: 38 S.	RNG: 18 E.	
FIELD BOOK	PG.		DRAWN BY: J.M./T.O.
...SURVEY\Midnight Pass Cross Sections 2024			CHECKED BY:

SHEET NO. 1 OF 1